


# BF400 da 1 a 6 leve

# BF400 from 1 to 6 levers




| Caratteristiche generali / Technical characteristics           |           |      |
|--|-----------|------|
|  | l/min GPM |      |
| • Portata nominale / Nominal flow                              | 35        | 9    |
| • Portata limite / Max flow                                    | 45        | 12   |
|  | bar PSI   |      |
| • Pressione nominale / Nominal pressure                        | 250       | 3600 |
| • Pressione max sugli utilizzi / Max pressure on ports         | 320       | 4700 |
| • Contropressione max allo scarico / Max pressure in tank-line | 80        | 1100 |

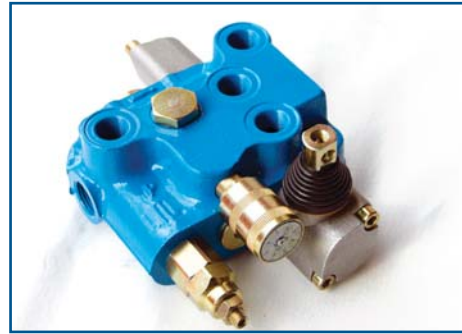

P=T - TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E

P=A/B - TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E


A/B=T - TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E

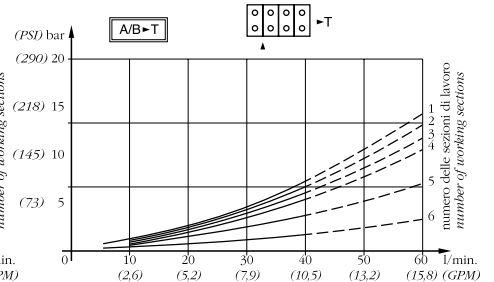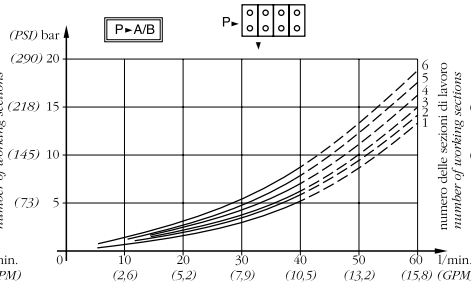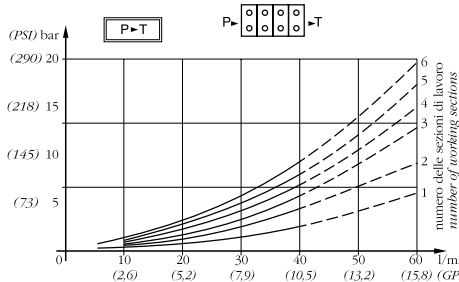

Gli elementi prioritari hanno 5÷8 bar in più a seconda della portata regolata

Priority elements get 5÷8 bar (72÷116 PSD) more according to related flow.

|            |  |
|------------|--|
| BF401/...= | n° 1 elemento prioritario<br>n° 1 priority element |
| BF402/...= | n° 2 elementi prioritari<br>n° 2 priority elements |
| BF403/...= | n° 3 elementi prioritari<br>n° 3 priority elements |
| BF404/...= | n° 4 elementi prioritari<br>n° 4 priority elements |
| BF405/...= | n° 5 elementi prioritari<br>n° 5 priority elements |
| BF406/...= | n° 6 elementi prioritari<br>n° 6 priority elements |

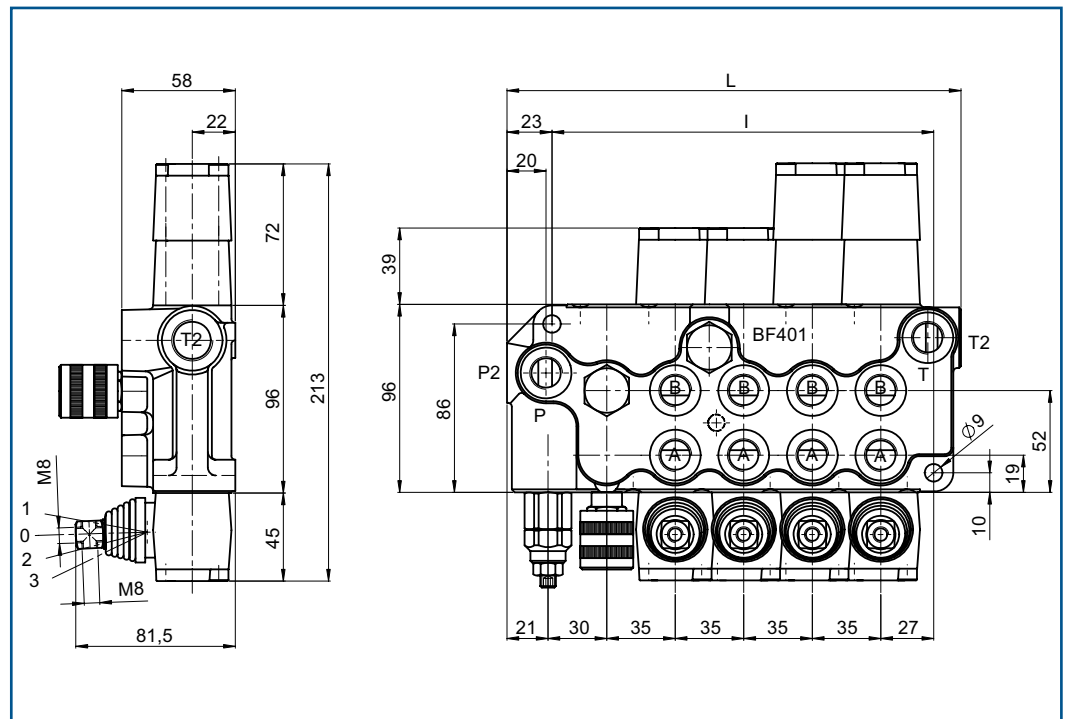

| MOD       | L   | I   | Kg  |
|-----------|-----|-----|-----|
| BF40.../1 | 125 | 90  | 3.9 |
| BF40.../2 | 160 | 125 | 5.2 |
| BF40.../3 | 195 | 160 | 6.4 |
| BF40.../4 | 230 | 195 | 7.6 |
| BF40.../5 | 265 | 230 | 8.8 |
| BF40.../6 | 300 | 265 | 10  |

| FILETTATURA STANDARD - STANDARD THREADS |           |           |           |                |                |
|---|-----------|-----------|-----------|----------------|----------------|
| COD                                     | A-B       | P         | T         | P <sub>2</sub> | T <sub>2</sub> |
| G                                       | 3/8"      | 3/8"      | 3/8"      | 1/2"           | 1/2"           |
| F                                       | 3/4" - 16 | 3/4" - 16 | 3/4" - 16 | 7/8" - 14      | 7/8" - 14      |

◀ Su richiesta filettature diverse  
Other threads available on request

