

BM10 da 1 a 6 leve


BM10 from 1 to 6 levers

Caratteristiche generali / Technical characteristics


	l/min	GPM
• Portata nominale / Nominal flow	10	2,5
• Portata limite / Max flow	15	4
	bar	PSI
• Pressione nominale / Nominal pressure	250	3600
• Pressione max sugli utilizzi / Max pressure on ports	320	4700
• Contropressione max allo scarico / Max pressure in tank-line	80	1100





P>T- TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E

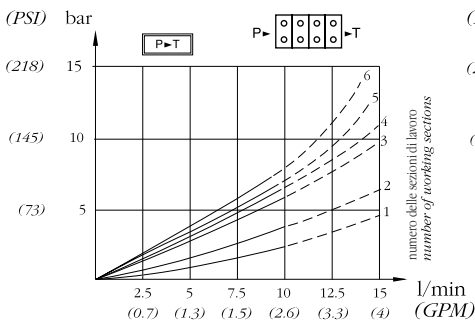

P>A/B- TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E

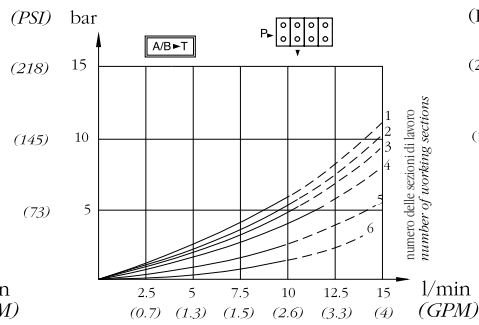

A/B>T- TEMPERATURA OLIO 50°C - VISCOSITÀ 3,5°E

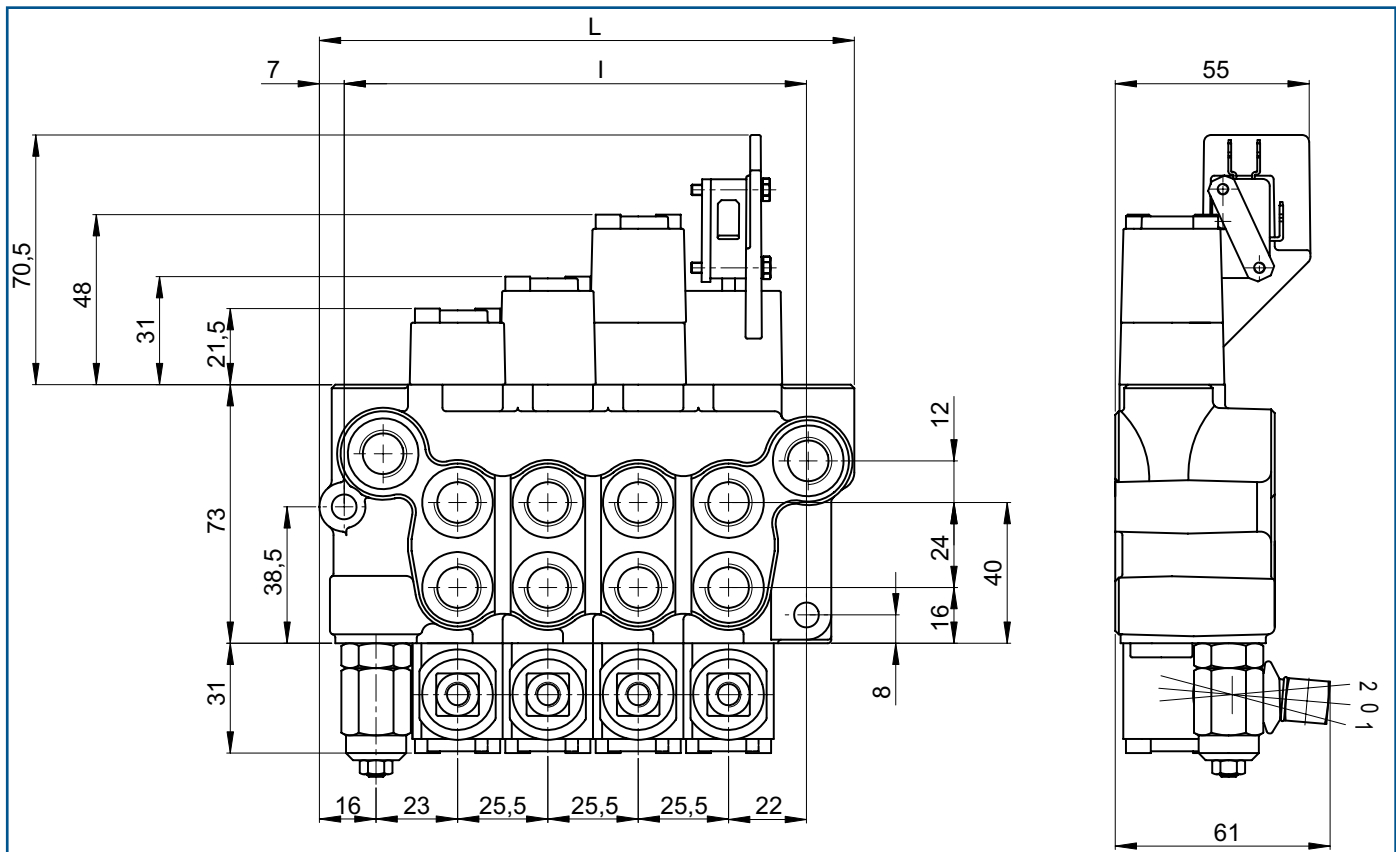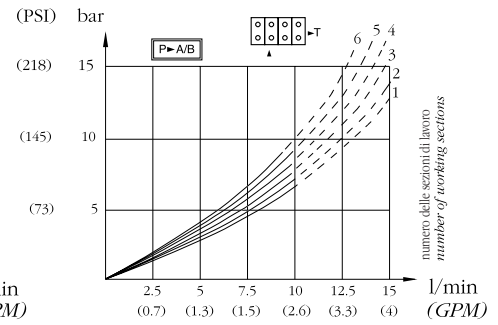

MOD	L	I	Kg
BM10/1	75	54	1,1
BM10/2	100,5	79,5	1,6
BM10/3	126	105	2,23
BM10/4	151,5	130,5	2,7
BM10/5	177	156	3,2
BM10/6	202,5	181,5	3,7

FILETTATURA STANDARD - STANDARD THREADS

COD	A-B	P	T	P ₂	T ₂
G	1/4"	1/4"	1/4"	1/4"	1/4"
F	9/16" - 18	9/16" - 18	9/16" - 18	9/16" - 18	9/16" - 18

◀ Su richiesta filettature diverse
Other threads available on request

